

English Version

**Packaging - Rigid plastic containers - PET finish 30/25 High  
(18,5)**

Emballage - Récipients en plastique rigide - Bague PET  
30/25 Haute (18,5)

Verpackung - Kunststoffbehälter - PET-  
Verschlussmundstück 30/25 hoch (18,5)

This European Standard was approved by CEN on 29 October 2011.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

**Management Centre: Avenue Marnix 17, B-1000 Brussels**

Contents		Page
Foreword.....		3
Introduction .....		4
1	Scope .....	5
2	Dimensions.....	5
3	Requirements .....	5
Bibliography .....		7

## Foreword

This document (EN 16064:2011) has been prepared by Technical Committee CEN/TC 261 “Packaging”, the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2012, and conflicting national standards shall be withdrawn at the latest by May 2012.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

Introduction

This European Standard is based on CE.T.I.E. (International Technical Centre for Bottling and Packaging) data sheet GME 30.21 (2007) [1].

Efficient packaging is of great importance for the distribution and the protection of goods. Insufficient or inappropriate packaging can lead to damage or wastage of the contents of the pack.



## 1 Scope

This European Standard specifies the dimensions and requirements of the 30 mm tall screw finish with three (3) thread starts for flat waters and non-carbonated beverages.

This finish can be used for aseptic filling and filling with introduction of nitrogen. The dimension (18,5) is the height in millimetres from the top of finish to the bottom of the support ledge.

This finish is designed to take a tamper evident plastic closure only. During first opening, the tamper evident band will separate from the closure shell and stay on a one-way bottle neck or like bottles in the returnable market, the tamper evident band will tear but will remain connected to the closure shell.

## 2 Dimensions

**2.1** The design and dimensions of the finish shall be as shown in Figure 1.

NOTE Another version exists with  $\varnothing C = 25$  mm and  $\varnothing A = 30,3$  mm.

**2.2** Dimensions of the 3 thread starts  $120^\circ$  apart.

120° of full depth thread per lead

R 9,6 thread lead-in

R 2,5 thread run-out

Lead: 9 mm (travel per turn)

**2.3** General tolerance for other radii:  $\pm 0,13$  mm.


**2.4** Weight on height 18,5 mm: 3,92 g (density = 1,335).

## 3 Requirements

The following requirements apply.

- This finish is a top, side and inside seal finish. This finish shall be smooth and free of any defects that will contribute to leaks. Flash shall not exceed 0,13 mm per side, and shall not be continuous.
- On the blown bottle, the control diameter C shall be free of any defects up to 4 mm down for the internal bore and across the sealing surface of the finish.
- Requirements for good closure application on finish:
  - 0,13 mm max. out-of-parallel sealing surface with neck support ledge is allowed;
  - an offset or vertical mismatch of thread is not to exceed 0,10 mm at the mould seam.  $\varnothing T$  dimension is not measured in the depressed area.
- Variations in  $\varnothing E$  are to follow uniformly those of  $\varnothing T$ .
- No overhang allowed at any point in  $360^\circ$  between  $\varnothing F$  and  $\varnothing G$ . A flash to 0,15 mm maximum step is allowable on one side only.  $\varnothing G$  does not exceed  $\varnothing E$ .

Dimensions in millimetres

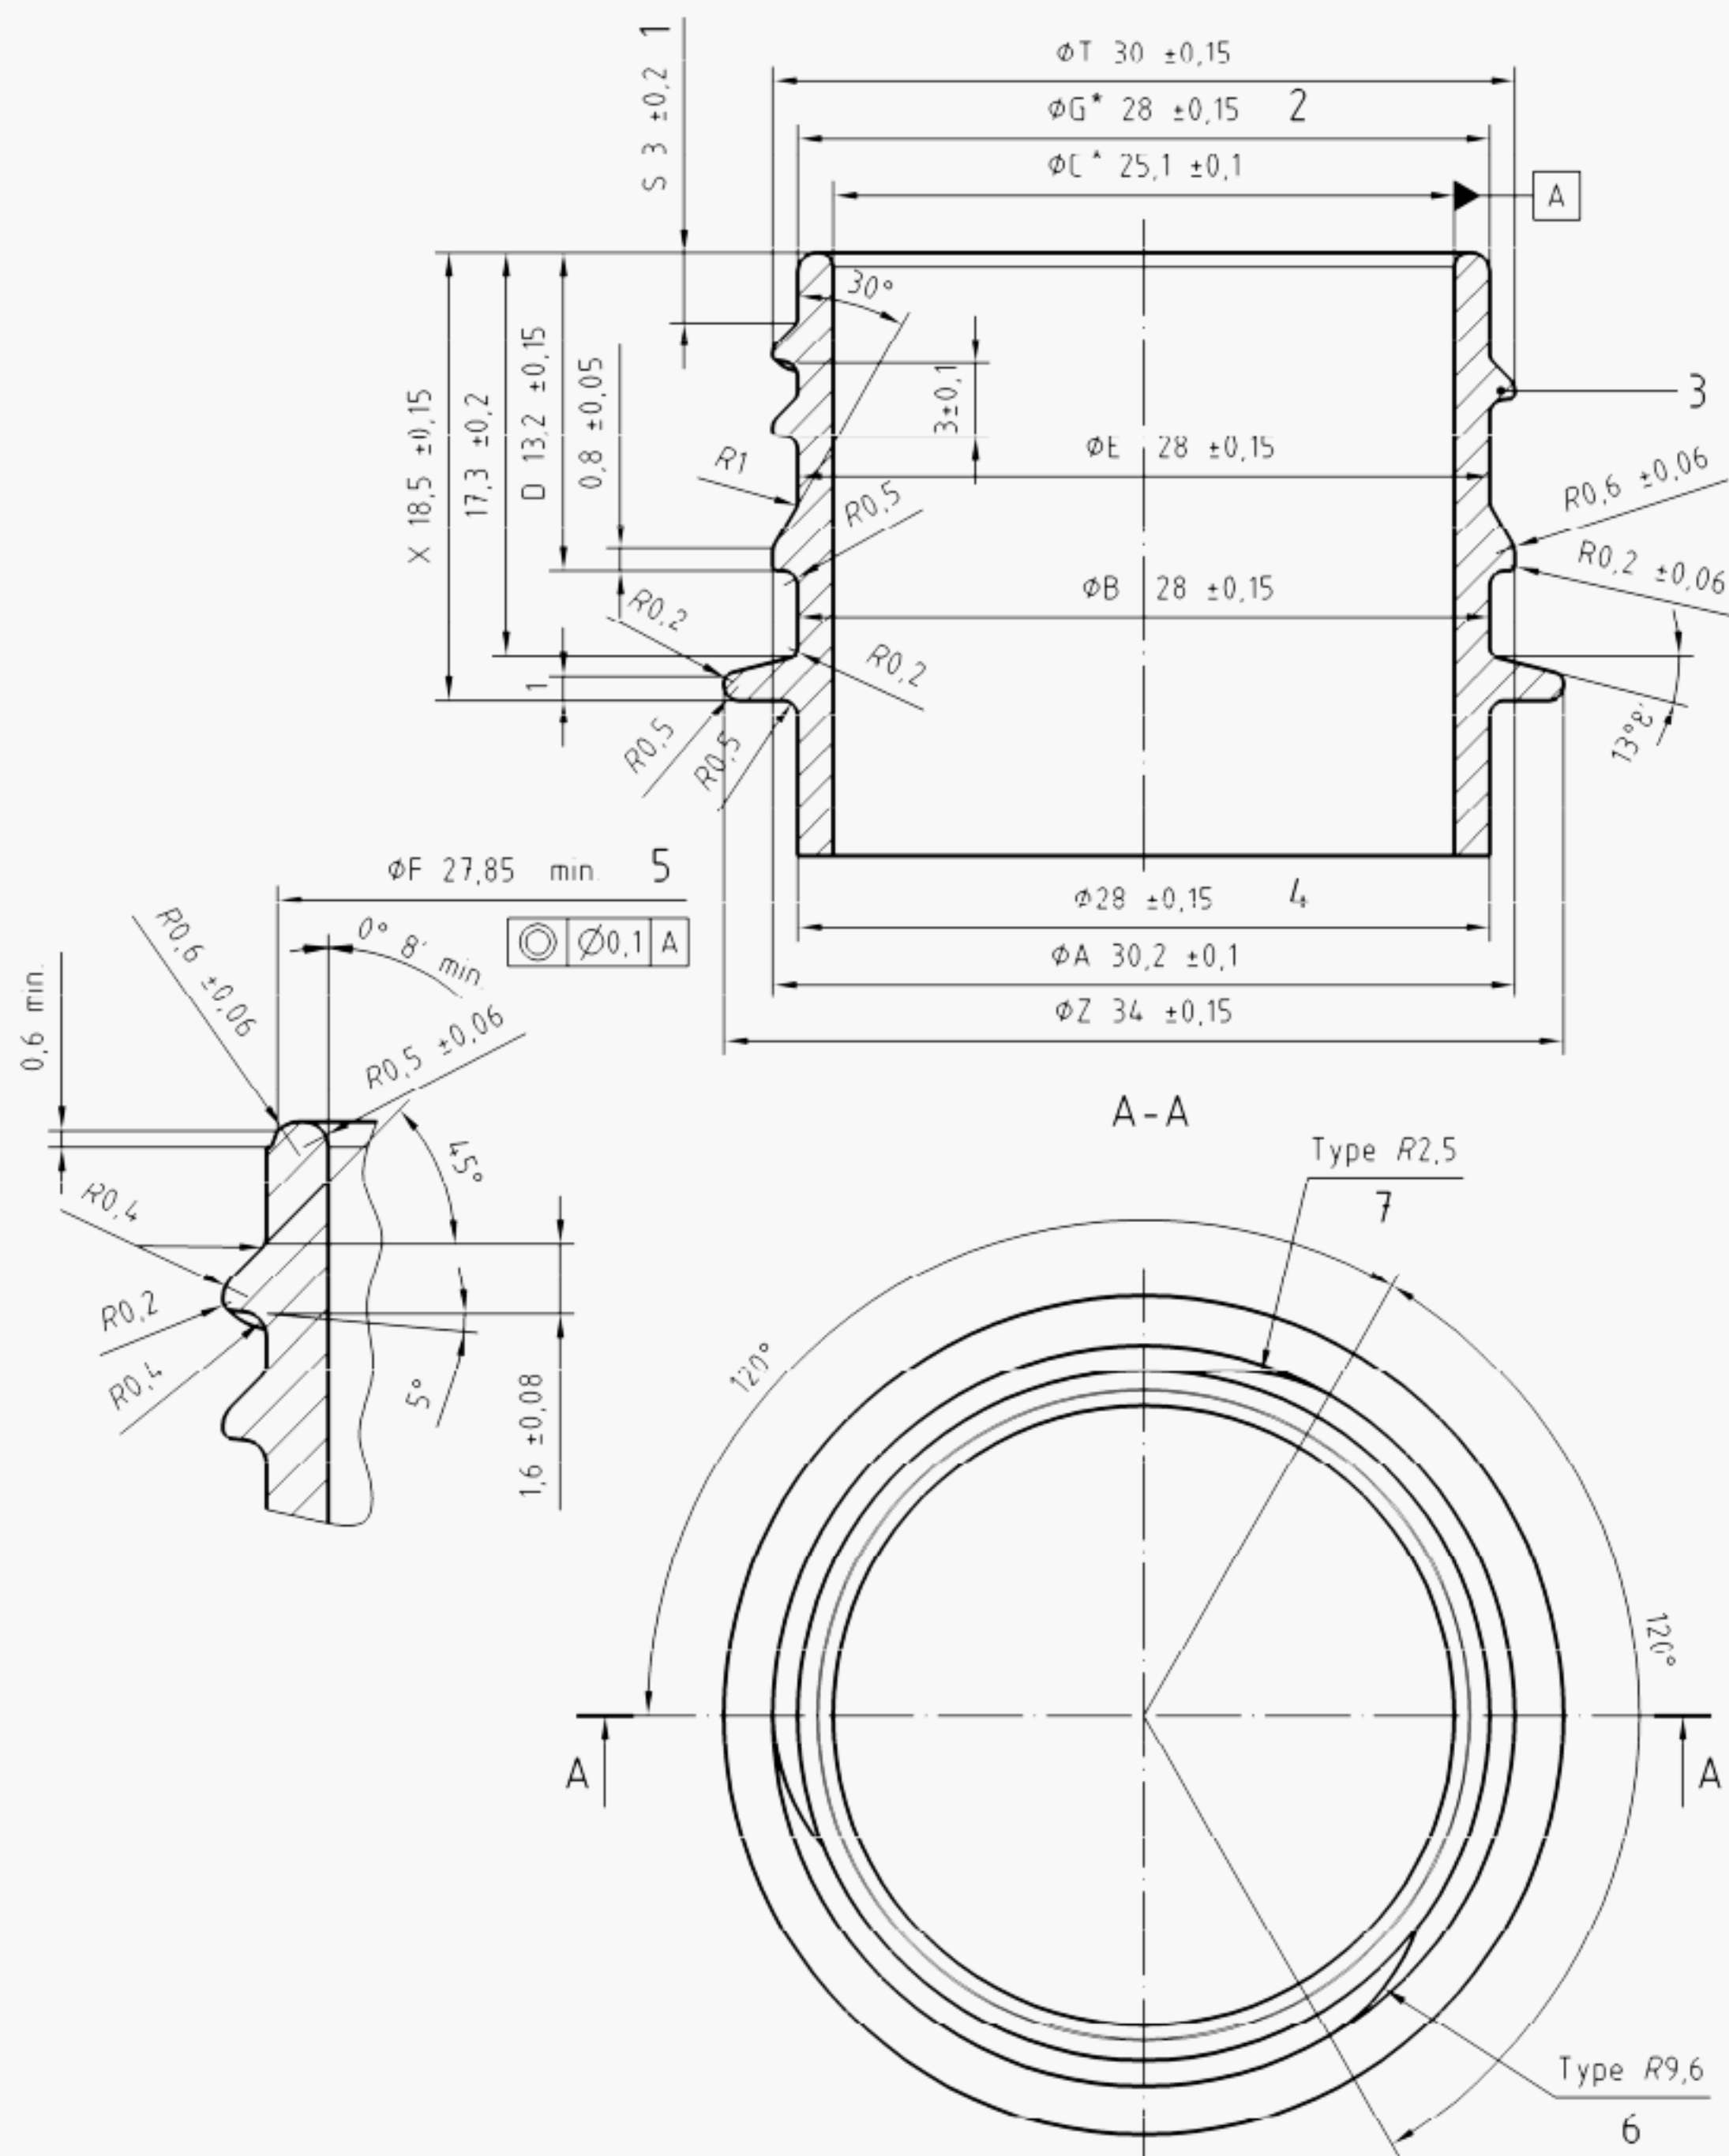

## Key

- 1 start thread
- 2 below parting line
- 3 thread starts 120° apart
- 4 straight

- 5 above parting line  
6 thread lead-in  
7 thread run-out

NOTE \* = includes ovality.

**Figure 1 — Design and dimensions of the finish**

## Bibliography

- [1] CE.T.I.E. data sheet GME 30.21 PET finish 30/25 H (18,5) – 2007 C.E.T.I.E. : International Technical Centre for Bottling and related Packaging – 112 – 114 rue La Boétie 75008 Paris – [www.cetie.org](http://www.cetie.org)